


KINGS ADVENTURE
TourerX

USER MANUAL

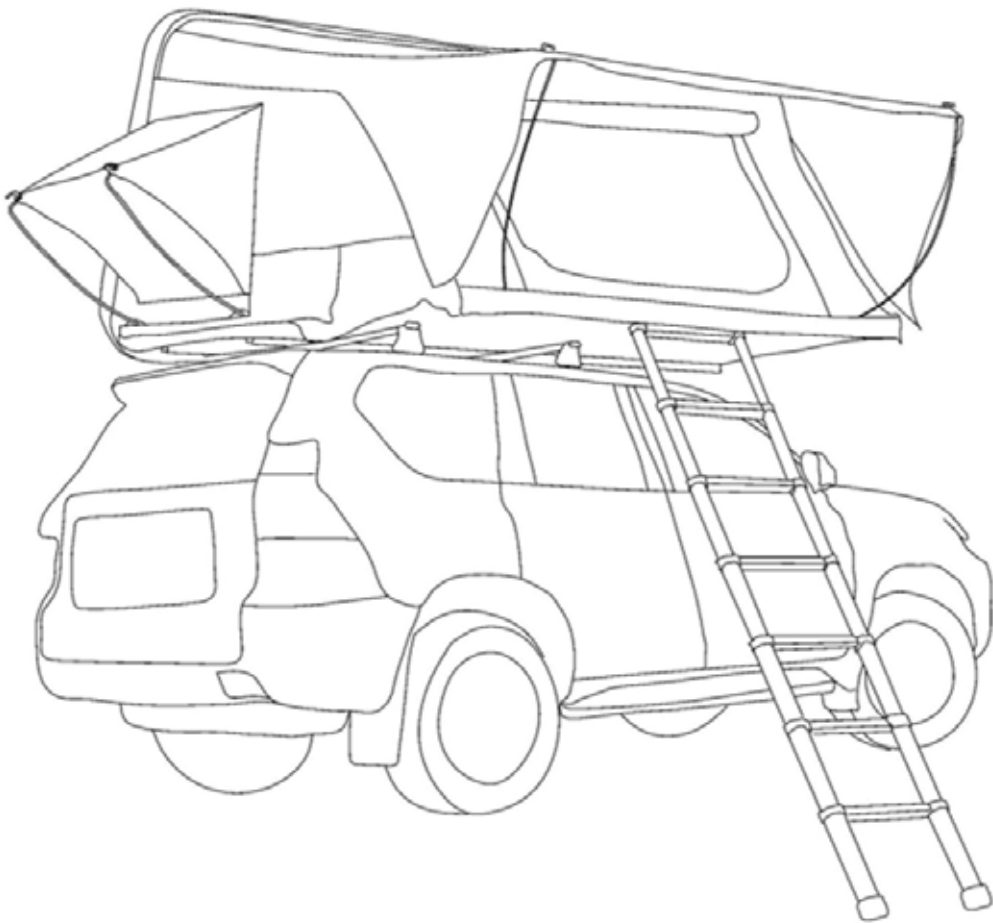

**PLEASE READ AND UNDERSTAND THIS MANUAL
COMPLETELY BEFORE USING THIS PRODUCT.**

TOURER X ROOF TOP TENT

SKU: AKTA-RTTPS_01

1. INTRODUCTION

This manual covers the safety information, components, installation instructions & setup instructions of the Adventure Kings Tourer X Roof Top Tent (RTT). The Adventure Kings Tourer X RTT is designed to be securely mounted to a vehicle roof for use as a recreational camping tent. For any questions or warranty claims please call 1800 883 964.

2. SAFETY INFORMATION

Please read and understand all the following safety information prior to mounting or setting up the Adventure Kings Tourer X RTT. Adhering to the following safety warnings will reduce the risk of damage to the product, damage to the vehicle or injury to persons.










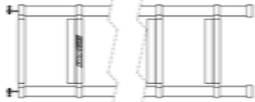
SAFETY WARNING



- Do not try and lift the RTT by yourself. Safe use of a forklift or a team of people is recommended.
- Ensure that the RTT is installed correctly as per the below installation instructions. All bolted connections should be checked regularly for tightness & general condition.
 - Ensure that the roof rack can support the total weight of the RTT and two adults.
- Ensure that the combined weight of the RTT & the roof rack is lower than the vehicle roof load limit. Consider that off-road travel increases the dynamic stresses on your vehicle.
- Position the RTT on the vehicle roof so that the weight is centered over the middle of the vehicle.
 - Note that the RTT will increase the weight & height of your vehicle.
- Take care when using the supplied telescopic ladder. Ensure it is securely clipped in before using. Be aware of pinching hazards when extending or packing away.
- Take care when opening and closing the RTT. Be aware of pinching hazards when closing.

3. COMPONENTS

The following shows what components are included in the Tourer X RTT.

ITEM	NAME	QTY	IMAGE
1	Hard Shell RTT	1	
2	Internal Roof Pole	1	
3	M8 x 55 Bolt	8	
4	M8 Nut	8	
5	Mounting Rail Caps	4	
6	Mounting Plate	4	
7	Mounting Slide	8	
8	Window Poles	6	
9	Ladder	1	
10	Roof Cover	1	

4. INSTALLATION INSTRUCTIONS

The following installation instructions refer to the fitting for the accessories and mounting the Tourer X RTT to a vehicle roof rack. All mounting fasteners supplied should be used.

**DO NOT LIFT THE RTT BY YOURSELF.
USE A TEAM OF PEOPLE OR A FORKLIFT.**

STEP 1


Unfold the tent and remove all the supplied fittings. Close RTT.

STEP 2

Lift the RTT onto the vehicle roof rack. Position RTT to allow space for the lid latches to be opened and closed.

STEP 3

Assemble bolts with mounting track adaptors. See image alongside.

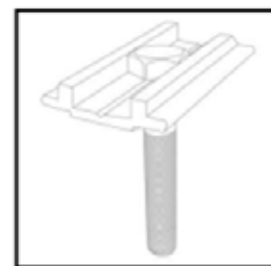

STEP 4


Push track slides with bolts into the desired tracks on the underside of the RTT by lifting the RTT to one side.

STEP 5

Ensure that the mounting bolts are aligned around the roof rack structural cross bars. (Use all 4 supplied mounting plates.)

STEP 6

When satisfied with the position of the RTT, place the mounting plates over the bolts and screw on the nyloc nuts. Tighten the nyloc nuts and ensure that the bolt thread has fully come through the nyloc nut. See image alongside.

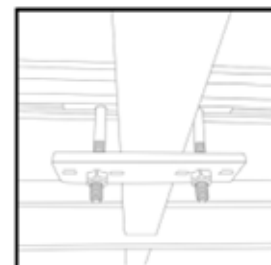

STEP 7

Regularly check the RTT bolted connections are secure. Tighten if necessary.

5. SETUP INSTRUCTIONS

The following instructions refer to the setup procedure for the Tourer X RTT.

STEP 1

Ensure that the vehicle is on level ground and the handbrake is on.

STEP 2

Unclip the 2 buckles on the side of the RTT to unlock the lid of the RTT.

STEP 3

Unclip the strap around the ladder. Pull the feet of the ladder out to extend to its full length and locking all the runs out.

STEP 4

Pull the feet of the ladder down as far as you can and then pull it out to open the bed of the RTT completely.

STEP 5

Adjust the ladder to make the floor of the RTT level.

STEP 6


Fit the 6 window poles to the to the windows. Slide the poles into the holes on the base of the RTT. Pull the hook end back in the eyelets of the windows.

STEP 7

Secure the fly to the base of the RTT.

STEP 8

Install the internal roof pole to the internal U pole via the C-Clip, then extend toward to hard-shell roof and feed the support pole through the black hanging loop and extend fully.

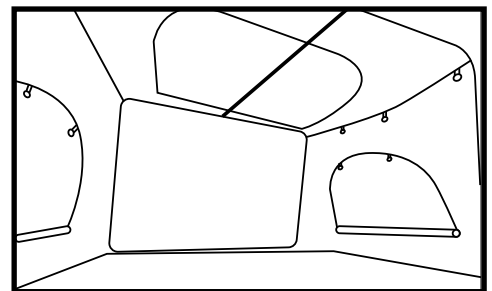

STEP 9

Install optional ceiling cover.

6. PACK UP INSTRUCTIONS

The following instructions refer to the pack up procedure for the Tourer X RTT.

STEP 1

Remove all camping items from the RTT.

STEP 2

Remove internal roof pole from the RTT.

STEP 3

Remove all 6 window poles.

STEP 4

Unhook the fly from the base of the RTT.

STEP 5

Lift the ladder to fold the floor into the RTT.

STEP 6

Collapse ladder by pushing and holding in the two bottoms towards each other. This will release the ladder lock and you will be able to push the ladder runs into itself and into the RTT. Clip the strap around all the ladder runs to hold it all together.

STEP 7

Locate the strap attached to the top of the RTT lid. Pull these straps down to lower the lid onto the RTT. With the lid almost closed tuck both sides in of any overlapping tent material.

STEP 8

Ensuring that all the tent is packed under the lid, close both buckles, securing the lid to the base of the RTT.

7. ROOF WINDOW INSTRUCTIONS

WARNING – Roof window can only be used with the RTT Fly rolled up. The RTT window tent is only suitable for wet weather if the fly is rolled down and clipped into the base. **DO NOT USE ROOF WINDOW IF WEATHER IS NOT CLEAR.**

STEP 1

Unclip the fly from the base of the RTT.

STEP 2

Unhook the fly from the main door window poles.

STEP 3

Unzip the mesh window in the roof of the RTT.

STEP 4

Unzip the canvas window in the roof of the RTT. This will gain you access to the outside of the RTT to roll up the fly.

STEP 5

Roll the fly up to the lid of the and secure to the ties provided.

STEP 6

Enjoy the views.

8. WARRANTY

12 MONTH LIMITED WARRANTY

WARRANTY PERIOD:

Full 12 month warranty from date of purchase against all manufacturing defects.

WHAT DOES THE WARRANTY COVER?

Under normal usage conditions, this warranty covers:

- a. Any defect in design or manufacture which results in the product failing to perform substantially as described in authorised advertising or literature.
- b. We will either repair or replace the product at our discretion providing that the fault is found to have been caused by a design or manufacturing defect and not misuse or tampering.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. The benefits provided to you as the consumer by this warranty are in addition to other rights and remedies available to you under the law.

THE WARRANTY DOES NOT COVER:

- a. Any damage resulting from improper use
 - b. Faulty installation or modification made during installation
 - c. The cost of removing and reinstalling the product
 - d. Travel and /or other expenses due to customer's remote location
 - e. Transport charges and damage in transit. It is your responsibility to deliver and pick up your product, including any costs associated with the postage of your repair or replacement product. If you do freight your product we recommend that you insure against loss or damage.
 - f. Any loss directly or indirectly associated with the product failing to operate.
 - g. Damage caused by mould, insects, animals, misuse, incorrect operation, adverse weather, accidents and fair wear and tear
-

TO MAKE A CLAIM, PLEASE ENSURE YOU RETAIN YOUR SALES RECEIPT OF PURCHASE

1800 88 39 64



OUTDOOR SUPACENTRE PTY LTD

Level 1, Building A, 6 Figtree Drive,
Sydney Olympic Park, NSW 2127, Australia

PHONE: 1800 88 39 64

www.4wdsupacentre.com.au